



ABACUS

ALL MEASUREMENTS ARE IN MILLIMETRES


MANUFACTURED FROM STAINLESS STEEL

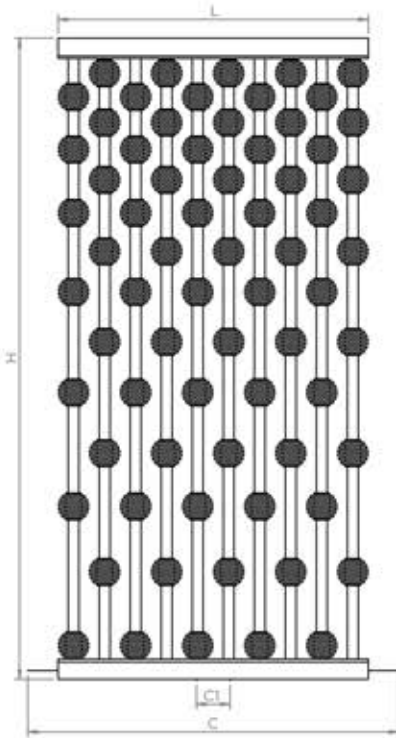



Front View

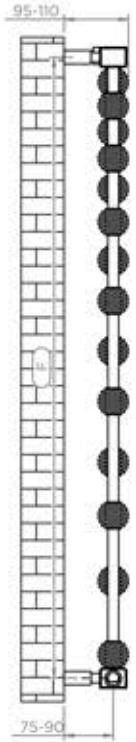

Side View

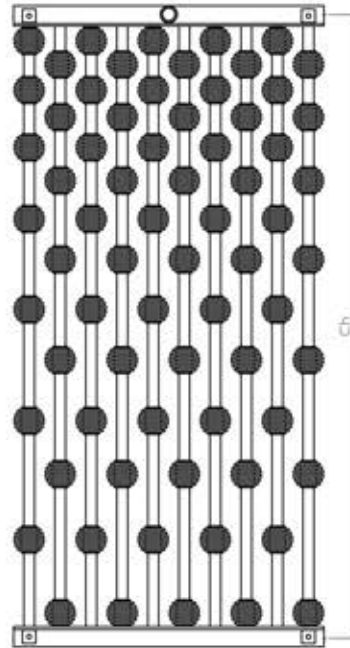


Back View

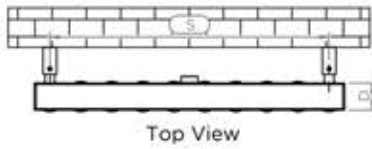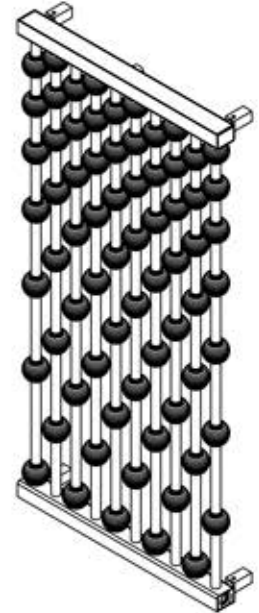


Top View

Plumbing Position:




When mounting vertically, please observe that the collector fitted with a flow diverter is mounted at the bottom. This can be verified by visually checking or by referring to the installation diagram

When mounting horizontally, please knock through the centre hole of the diverter using a suitable rod. Please remove the disk if it comes loose and can be removed from a tapping



Vertical mount
(Horizontal mount is possible by special order)
All Dimensions are in mm
Max. Working Pressure: 10 Bar
Max. Working Temperature: 95° C
Inlet / Outlet : 1/2" BSP
Fuel : E/H/D

Installation Accessories:



Manufacturing Tolerance : ± 5 mm

| PRODUCT CODE | Height | Length | Depth | Pipe Centres Vertical | Pipe Centres Horizontal | Bracket Centres | |
|--------------|--------|--------|-------|-----------------------|-------------------------|-----------------|-----|
| | H | L | D | C-C1 | Ch | F | S |
| | mm | mm | mm | mm | mm | mm | mm |
| AB10-70 | 950 | 460 | 45 | 50-550 | 920 | 920 | 414 |
| AB16-95 | 1600 | 460 | 45 | 50-550 | 1570 | 1570 | 414 |

FR.71-Rev.00

Technical specifications are subject to change without prior notice.

AEON is the designer heating division of Pitacs Limited.
Pitacs Limited, Bradbourne Point, Bradbourne Drive, Tilbrook, Milton Keynes,
Buckinghamshire, MK7 8AT, UK

T: +44 (0)1908 271155 E: info@pitacs.com W: www.aeon.uk.com

