

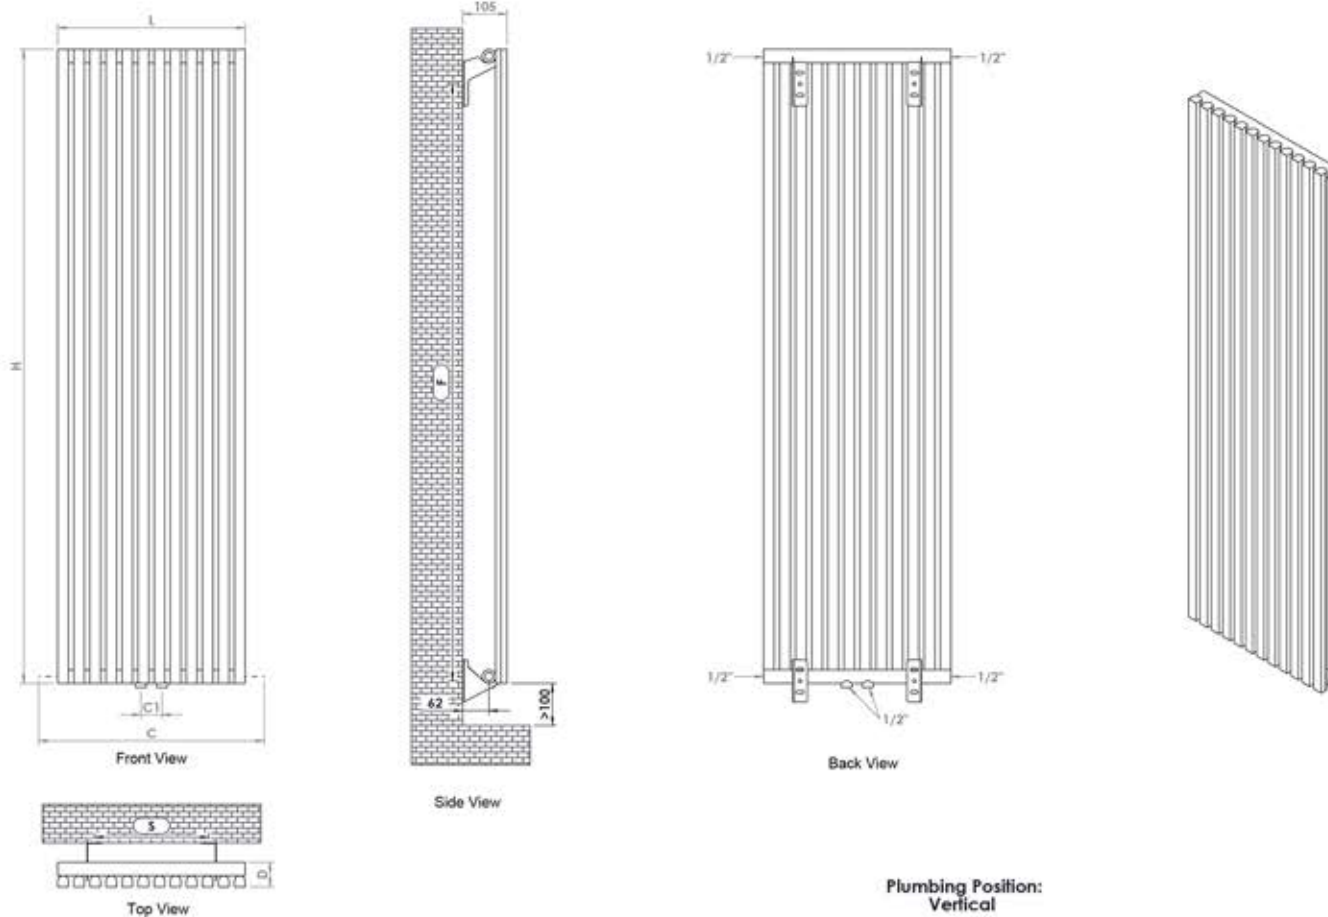


Ultraheat "Klon" Designer Single D-Profile Vertical Radiators

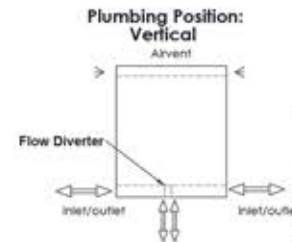

Installation Accessories:

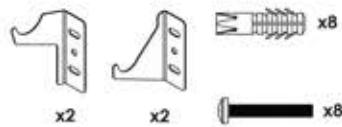


When mounting vertically, please observe that the collector fitted with a flow diverter is mounted at the bottom. This can be verified by visually checking or by referring to the installation diagram

Vertical mount
All Dimensions are in mm
Max. Working Pressure: 10 Bar
Max. Working Temperature: 95° C
Inlet / Outlet : 1/2" BSP
Fuel : E/H/D

PRODUCT CODE	Height	Length	Depth	Pipe Centres	Bracket Centres	
	H	L	D	C1-C	F	S
	mm	mm	mm	mm	mm	mm
KS1506	1500	215	58	50-305	1410	115
KS1510	1500	367	58	50-457	1410	195
KS1512	1500	443	58	50-533	1410	271
KS1806	1800	215	58	50-305	1710	115
KS1810	1800	367	58	50-457	1710	195
KS1816	1800	595	58	50-685	1710	423
KS2006	2000	215	58	50-305	1910	115
KS2014	2000	519	58	50-609	1910	347


NWT Direct Ltd
Unit 5, Conwy Morfa Enterprise Park, Conwy, LL32 8FA
Telephone No: 01492573738, Fax No: 01492 593336, Email: info@nwtirect.co.uk

Ultraheat "Klon" Designer Double D-Profile Vertical Radiators

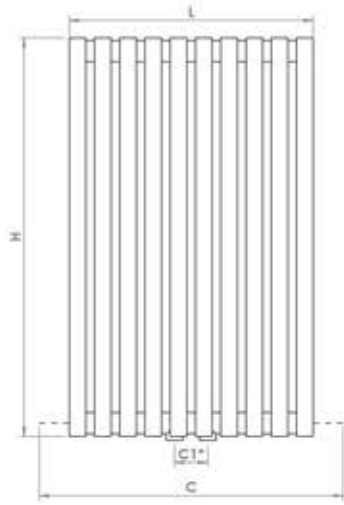


Front View

C1*:available for vertical model

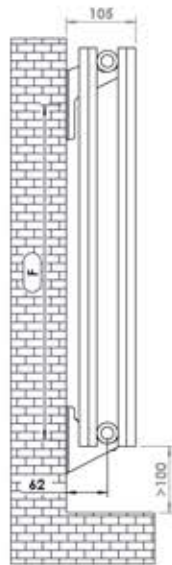


Side View

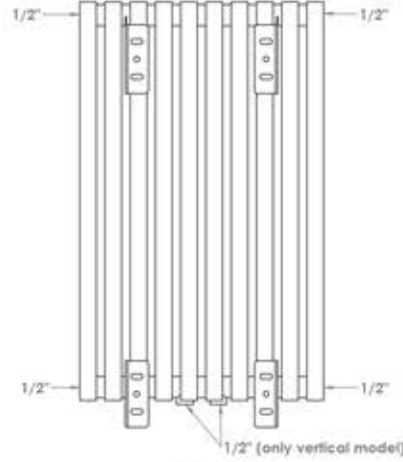

Back View

Plumbing Position: Vertical


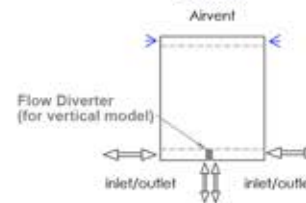


For Vertical Models:
When mounting vertically, please observe that the collector fitted with a flow diverter is mounted at the bottom. This can be verified by visually checking or by referring to the installation diagram

Vertical mount
All Dimensions are in mm
Max.Working Pressure: 10 Bar
Max.Working Temperature: 95° C
Inlet / Outlet : 1/2" BSP
Fuel : E/H/D

PRODUCT CODE	Height	Length	Depth	Pipe Centres	Bracket Centres	
	H mm	L mm	D mm	C1-C mm	F mm	S mm
KLON - Vertical						
KD1506	1500	215	85	50-305	1410	116
KD1510	1500	367	85	50-457	1410	195
KD1514	1500	519	85	50-609	1410	347
KD1806	1800	215	85	50-305	1710	116
KD1810	1800	367	85	50-457	1710	195
KD1812	1800	443	85	50-533	1710	271
KD1814	1800	519	85	50-609	1710	347
KD1816	1800	595	85	50-685	1710	423
KD2006	2000	215	85	50-305	1910	116
KD2010	2000	367	85	50-457	1910	195
KD2014	2000	519	85	50-609	1910	347

Installation Accessories:

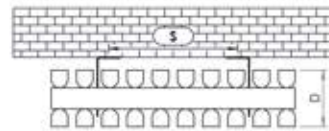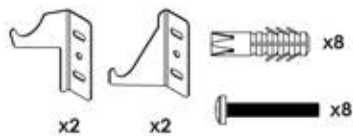

Top View